




ECO PHYSICS nCLD AL³/ 8555

APPLICATION EXAMPLES

- Ambient air monitoring
- Outdoor and indoor application
- Certification and calibration
- Research

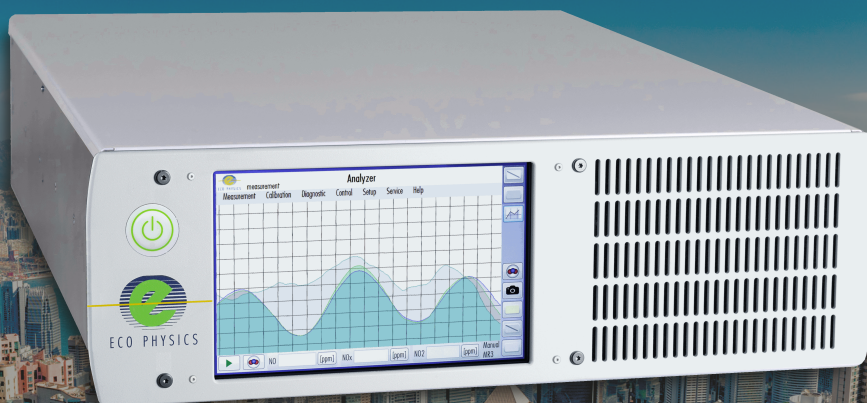

The nCLD AL³ and 8555 are the world's first three-channel high precision ambient air monitoring and specialty gases instrumentation. Unique in speed and reliability, the nCLD AL³ and 8555 are modular designed and capable of simultaneously measuring NO, NO₂, NO_x and NH₃. Its graphical user interface also individually displays and connects to other instruments' data.

Measurement of:

- NO
- NO₂
- NO_x
- NH₃

Flexible Ambient Air Monitoring

The nCLD AL³/8555 is the ideal instrument for ambient air and specialty gases monitoring, either installed in racks, fixed monitoring stations or mobile laboratories. Besides the ambient air in the open environment, the analyzer is also suitable for gas and air quality monitoring in production plants (TLV = threshold limit value). The measurement ranges are individually adjustable, the parameters are NO, NO₂, NO_x and NH₃. The instrument's inlet operates at ambient pressure. Calibration of the unit runs quick and automatic while all necessary data is continuously stored and readily available anywhere and at any time.

User Friendliness


The new touch sensitive graphical user interface enables the user to individually adjust the instrument operation and data management according to his/ her needs and applications. The bright 7" monitor gives a clear overview and allows numerical and graphical display of values. Multiple digital in- and outputs guarantee a maximal connectivity and flexibility for the remote operation, control and maintenance ensuring unsurpassed precision and reliability.

Compact, Modular and Intelligent!

The nCLD AL³/8555 is manufactured in a new compact and modular layout, in which each essential component of the chemiluminescence analyzer hosts its own CPU and interacts with other CPUs by BUS-communication. This assembly increases accessibility and serviceability by reducing wiring and piping. The measurement principle is based on the TuV/ QAL1 certified nCLD AL2 and conforms to ambient air standards (EN 14211).

- Rapid system integration and rack mounting
- Compact and modular design
- Virtually maintenance free even in continuous operation
- Four freely selectable measuring ranges

Graphical user interface for individual analyzer operation and data management

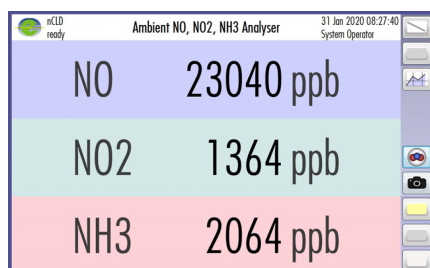

Measurably better

SPECIFICATIONS



nCLD AL³/8555

Analyzer type	three chamber CLD with cooled PMT for simultaneous measurement of NO, NO ₂ , NO _x , NH ₃	Power required	350 VA (incl. membrane pump and ozone scrubber)
Measuring ranges	four freely selectable ranges from 100 ppb - 50'000 ppb NH ₃ - 5'000 ppb	Supply voltage	100 - 240 V/50 - 60 Hz
Min. detectable concentration*	0.4 ppb	Interface	USB(3x), HDMI, Bluetooth, RS232 (w/o 9pin connector), LAN, WLAN
Noise at zero point (1σ)*	< 0.2 ppb	Dimensions	height: 133 mm (5¼ ") width: 450 mm (19 ") with molding: 495 mm depth: 540 mm (21.2 ")
Lag time	< 3 sec	Weight	23 kg (51 lb)
Rise time (0 - 90%)	< 1 sec	Delivery includes	nCLD AL ³ analyzer, power cable, FTDI-RS232-USB cable, USB-LAN adapter, HDMI adapter
Temperature range	0 - 40 °C	Standard	nCLD AL ³ · Y - molybdenum converter · C - catalyst converter
Humidity tolerance	5 - 95% rel. h (non-condensing, ambient air and sample gas)	Options	· USB-RS232 9pin connector · 0 - 10 V · 4 - 20 mA into 500 Ω max.
Sample flow rate	1.0 l/min	Analogue output (External Box)	
Input pressure	600 - 1200 mbar abs.		
Dry air use for O ₃ generator	internally generated (no external supply gas required)		

© ECO PHYSICS AG, Switzerland 2023-1/2

FLOW DIAGRAM

*Depending on filter setting
Connectivity properties are country-specific
ECO PHYSICS reserves the right to change these specifications without notice.

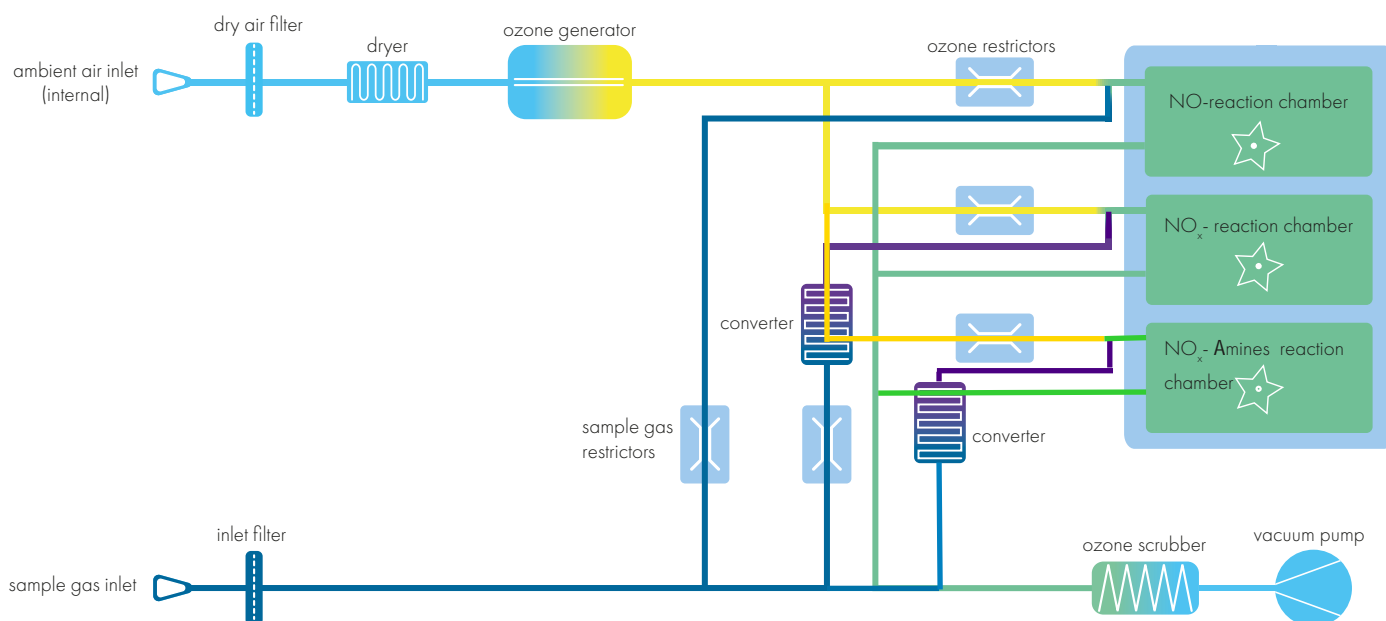

ECO PHYSICS AG · CH-8635 DUERNTEN · TEL. +41 55 220 22 22 · E-MAIL INFO@ECOPHYSICS.COM

WWW.ECOPHYSICS.COM